


Flat, Low-Profile Splice Provides Strength and Durability

Clipper® G Series™ Lacing is precision stamped from 316L stainless steel and then machine-applied for consistent compression, resulting in a uniform and flat splice. G Series lacing features a staggered-leg design with four alternating leg lengths. These varying points of belt penetration provide additional strength and durability for the finished splice. Ideal for use in food manufacturing, package and parts handling, and filter media, the Clipper G Series is designed for use with PVC, PU, and PES belting.



Corrosion-Resistant
stainless steel for
demanding applications

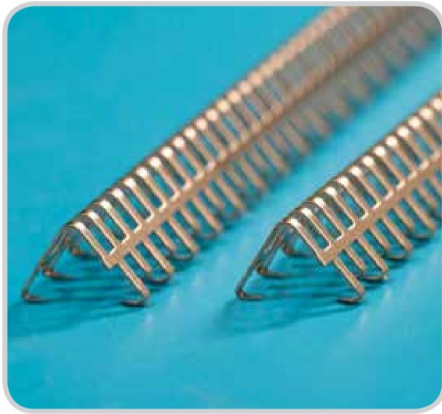

Flat, Low-Profile
splice is ideal for
applications with
slider beds



Staggered Leg Geometry
increases the strength and
durability of the splice



Precision Stamping
ensures a consistent pitch over the
entire length of the lacing for easier
machine installation



Machine-Application
results in a uniform, flat
splice – even on belts prone
to belt wave

Features and Benefits:

- Easy to install with proven Clipper maintenance and production lacers, G Series splices are uniform and extremely low profile.
- The staggered legs on G Series lacing provide for varying points of belt penetration which increases both the strength and durability of the splice.
- The flat, continuous top bar design eliminates belt wave and reduces the risk of dislodged fasteners.
- G Series lacing is joined with a corrugated stainless steel wire connecting pin that prevents pin migration during use.

Ordering Information

Size	Ordering Number	Item Code	Strips Per Box	Strip Length	
				in.	mm
G005A	G005A-SS-300W-12/BX	05492	12	12	300
	G005A-SS-600W-8/BX	05493	8	24	600
	G005A-SS-900W-8/BX	05494	8	36	900
	G005A-SS-1200W-8/BX	05495	8	48	1200
	G005A-SS-1500W-8/BX	05496	8	60	1500
G005	G005-SS-300W-12/BX	05497	12	12	300
	G005-SS-600W-8/BX	05498	8	24	600
	G005-SS-900W-8/BX	05499	8	36	900
	G005-SS-1200W-8/BX	05500	8	48	1200
	G005-SS-1500W-8/BX	05501	8	60	1500
G006A	G006A-SS-300W-12/BX	05502	12	12	300
	G006A-SS-600W-8/BX	05503	8	24	600
	G006A-SS-900W-8/BX	05504	8	36	900
	G006A-SS-1200W-8/BX	05505	8	48	1200
	G006A-SS-1500W-8/BX	05506	8	60	1500
G006	G006-SS-300W-12/BX	05507	12	12	300
	G006-SS-600W-8/BX	05508	8	24	600
	G006-SS-900W-8/BX	05509	8	36	900
	G006-SS-1200W-8/BX	05510	8	48	1200
	G006-SS-1500W-8/BX	05511	8	60	1500
G008	G008-SS-300W-12/BX	05544	12	12	300
	G008-SS-600W-8/BX	05545	8	24	600
	G008-SS-900W-8/BX	05546	8	36	900
	G008-SS-1200W-8/BX	05547	8	48	1200
	G008-SS-1500W-8/BX	05548	8	60	1500

G Series™ Fastener and Pin Size Selection Chart

Minimum Pulley Diameter	Material Thickness		Connecting Pin Size		Belt Thickness					
	in.	mm	in.	mm	.059" (1.5 mm)	.078" (2.0 mm)	.098" (2.5 mm)	.118" (3.0 mm)	.138" (3.5 mm)	.197" (5.0 mm)
1.6" (40 mm)	.019	.50	.047	1.20	G005A					
	.029	.75	.055	1.40	G005					
2.0" (50 mm)	.019	.50	.047	1.20	G006A					
	.029	.75	.055	1.40			G006			
3.0" (75 mm)	.039	1.0	.079	2.00					G008	