

PUNCH-LOK

'Punch-Lok'[®] Pre-Formed Clamps are stocked in Stainless Steel grade 201 material which is particularly suitable for high tensile hose clamping applications. It also offers corrosion resistance. Supplied ready for use, 'Punch-Lok'[®] Pre-Formed Clamps are the fastest method of Band Clamping available. To use the 'Punch-Lok'[®] Pre-Formed Clamp, simply insert the hose and fitting into the clamp, slide the P-1000 Tool up the clamp 'tail' to the Lok, tighten the clamp using the ball ended handle, 'Punch' the 'Lok' using a hammer on the punch head and then lift the tool over the Lok to snap off the surplus tail. 'Punch-Lok'[®] Pre-Formed Clamps are also available in high strength galvanised carbon steel in exactly the same sizes. These clamps are readily available and are suitable for most applications. They offer a low cost alternative to stainless steel. Please ask for pricing. 'Punch-Lok'[®] diameters are normally generous, however, if you are in any doubt, please select the next clamp diameter up. Also available, in sizes up to 300mm inside diameter, are a range of clamps which are non-spring, pre-coiled to a specific diameter. They are not laced up through the Lok and are for use in applications where a Pre-Formed clamp cannot be placed over the end of a hose.

I.D. AS SUPPLIED IN MM	PART NO	CLAMP WIDTH IN MM (INS)
21.0	P-3-S	9.5 (3/8")
35.0	P-311-S	9.5 (3/8")
25.4	P-4-S	16 (5/8")
32.0	P-5-S	16 (5/8")
38.1	P-6-S	16 (5/8")
44.4	P-7-S	16 (5/8")
50.8	P-8-S	16 (5/8")
57.1	P-9-S	16 (5/8")
63.5	P-10-S	16 (5/8")
69.8	P-11-S	16 (5/8")
76.2	P-12-S	16 (5/8")
88.9	P-14-S	16 (5/8")
101.6	P-16-S	16 (5/8")
114.3	P-18-S	16 (5/8")
127.0	P-20-S	16 (5/8")
152.0	P-24-S	16 (5/8")
165.0	P-26-S	16 (5/8")
178.0	P-28-S	16 (5/8")
203.0	P-30-S	16 (5/8")




PREFORMED J-LOK CLAMPS

PUNCH-LOK J-LOK clamps have stainless steel buckles for added strength and corrosion resistance - with your choice of stainless steel or high carbon electro galvanized steel bands. Totally different than punch type clamps these J-LOK clamps are not for use with punch-type tools. They are designed exclusively for application with non-punch type mechanical and air tools.

STAINLESS STEEL

Catalogue Number	Clamp Inside Diameter	Band Width	Clamps per Std Carton
PJ-201	13/16"	3/8"	100
PJ-243	1"	3/8"	100
PJ-293	1"	5/8"	100
PJ-294	1 1/4"	5/8"	100
PJ-202	1 3/8"	3/8"	100
PJ-205	1 1/2"	5/8"	100
PJ-206	1 3/4"	5/8"	100
PJ-245	2"	3/8"	100
PJ-207	2"	5/8"	100
PJ-227	2"	3/4"	100
PJ-208	2 1/4"	5/8"	100
PJ-209	2 1/2"	5/8"	100
PJ-210	2 3/4"	3/4"	50
PJ-246	3"	3/8"	100
PJ-211	3"	3/4"	50
PJ-255	3 1/4"	3/8"	100
PJ-212	3 1/2"	3/4"	50
PJ-213	4"	3/4"	25
PJ-214	4 1/2"	3/4"	25
PJ-215	5"	3/4"	25
PJ-216	6"	3/4"	25
PJ-218	7"	3/4"	25
PJ-219	8"	3/4"	25

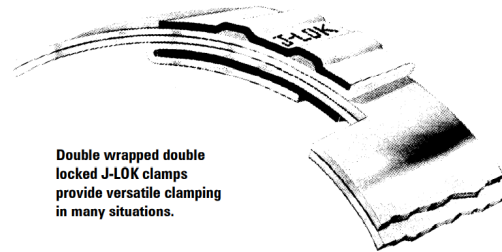

NOTE: These clamps are not to be used with punch-type tools.

STAINLESS STEEL BANDING

Punch-Lok Banding

Available in standard stainless steel, high-carbon electrogalvanized steel, and Type 316 stainless steel. Thread band through buckle twice for greatest strength. To apply, use Punch-Lok banding tool, Model PB-001 or equivalent.

100' PER ROLL:

Catalogue Number	Band Width	Band Thickness
STANDARD-DUTY TYPE 302		
PB-203	3/8"	.025"
PB-204	1/2"	.030"
PB-205	5/8"	.030"
PB-206	3/4"	.030"



BUCKLES/CLIPS

Catalogue Number	Band Width	Pieces per Box
STANDARD-DUTY BUCKLES		
PB-253	3/8"	100
PB-254	1/2"	100
PB-255	5/8"	100
PB-256	3/4"	100



P1 Punch-lok Tool



PB001 Punch-lok Banding Tool



P38 Clamp Master Tool