


British Standard Hollow Pin Conveyor Chain

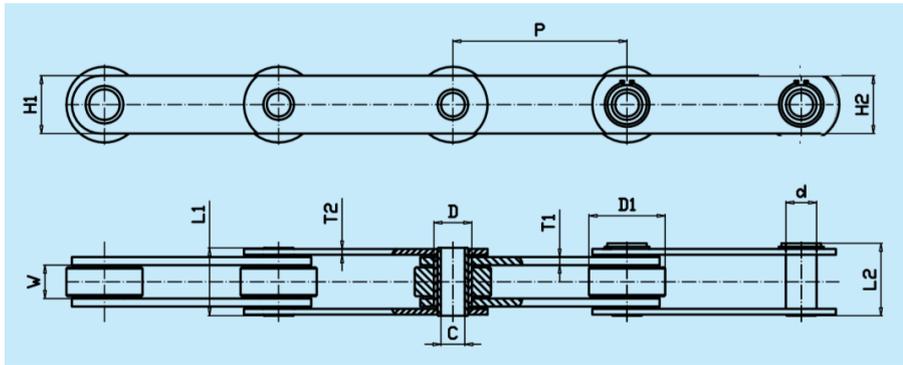

Minimum tensile strength in lbs	Pitch ('P')		Width between Inner Plates (Min) ('W')	Roller Dia ('D1')	Bush Dia ('D')	Hollow pin bore Dia (Min) ('C')	Hollow pin Dia ('d')	Hollow pin length (Max) ('L1')	Connecting pin length (Max) ('L2')	Inner Plate		Outer Plate		Avg. Wt/Mtr in (Kg)	
	INCH	METRIC								Height ('H1')	Thickness ('T1')	Height ('H2')	Thickness ('T2')		
6000	2.0	50.80	15.00	31.80	18.00	10.10	14.00	36.50	38.90	25.40	3.80	25.40	3.80	3.68	
	2.5	63.50													3.29
	3.0	76.20													3.02
	4.0	101.60													2.71
	5.0	127.00													2.51
	6.0	152.40													2.38
12000	2.0	50.80	19.00	47.60	23.60	13.20	19.00	45.60	47.50	38.10	5.10	38.10	3.80	5.49	
	3.0	76.20												7.28	
	4.0	101.60												6.21	
	5.0	127.00												5.57	
	6.0	152.40												5.13	
	7.0	177.80												4.83	
	8.0	203.20												4.61	
	9.0	228.60												4.42	
24000	4.0	101.60	25.40	66.67	33.20	20.10	26.90	57.00	60.50	51.00	7.10	51.00	5.10	13.16	
	5.0	127.00												11.58	
	6.0	152.40												11.27	
	7.0	177.80												9.77	
	8.0	203.20												9.21	
	9.0	228.60												8.78	
	12.0	304.80												7.90	
36000	5.0	127.00	38.10	88.90	38.10	23.10	31.80	79.50	84.00	61.00	8.90	61.00	7.60	25.47	
	6.0	152.40												22.62	
	7.0	177.80												20.58	
	8.0	203.20												19.05	
	9.0	228.60												17.87	
	12.0	304.80												15.49	

Welded attachments available upon request. Bolted connectors available on request. Non Standard attachments available. All chains available in stainless steel and plated materials versions.
 * Not Interchangeable With Other Brands*