


British Standard Solid Pin Conveyor Chain

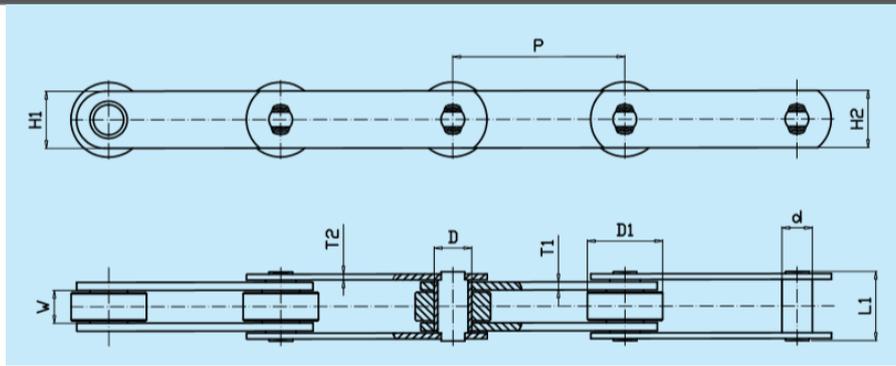

Minimum tensile strength in lbs	Pitch ('P')		Width between Inner Plates (Min) ('W')	Roller Dia ('D1')	Bush Dia ('D')	Solid pin Dia ('d')	Solid pin length (Max) ('L1')	Connecting pin length (Max) ('L2')	Inner Plate		Outer Plate		Avg. Wt/Mtr in (Kg)	
	INCH	METRIC							Height ('H1')	Thickness ('T1')	Height ('H2')	Thickness ('T2')		
7500	2.0	50.80	15.00	31.80	18.00	14.00	38.00	42.60	25.40	3.80	25.40	3.80	4.07	
	2.5	63.50												3.59
	3.0	76.20												3.29
	4.0	101.60												2.88
	5.0	127.00												2.65
	6.0	152.40												2.49
15000	2.0	50.80	19.00	47.60	23.60	19.00	46.00	49.80	38.10	5.10	38.10	3.80	8.14	
	3.0	76.20											7.77	
	4.0	101.60											6.56	
	5.0	127.00											5.85	
	6.0	152.40											5.34	
	7.0	177.80											5.00	
	8.0	203.20											4.78	
	9.0	228.60											4.53	
30000	4.0	101.60	25.40	66.67	33.20	26.90	60.00	65.40	51.00	7.10	51.00	5.10	14.50	
	5.0	127.00											12.65	
	6.0	152.40											11.40	
	7.0	177.80											10.52	
	8.0	203.20											9.87	
	9.0	228.60											9.34	
	12.0	304.80											8.31	
	45000	5.0											127.00	38.10
6.0		152.40	24.69											
7.0		177.80	22.31											
8.0		203.20	20.55											
9.0		228.60	19.21											
12.0		304.80	16.49											
60000	6.0	152.40	38.10	88.90	38.10	23.00	82.00	86.90	61.00	8.90	61.00	7.60	23.73	
	7.0	177.80											21.96	
	8.0	203.20											20.26	
	9.0	228.60											18.94	
	12.0	304.80											16.28	
90000	6.0	152.40	38.10	88.90	38.10	29.40	94.00	98.60	63.50	13.00	63.50	10.00	29.61	
	9.0	228.60											23.78	
	12.0	304.80											20.87	

Welded attachments available upon request. Bolted connectors available on request. Non Standard attachments available. All chains available in stainless steel and plated materials versions.
 * Not Interchangeable With Other Brands*